

SAFELINE
We illuminate your future

FLOOR LAMP



MODEL:SL-PL006

7-10W/12-20W/25-30W



intertek




THERMAL MANAGEMENT

Structure is optimized by advanced FEA technology. Achieving longer lifespan at best cost-efficiency.




Thermal Air Convection

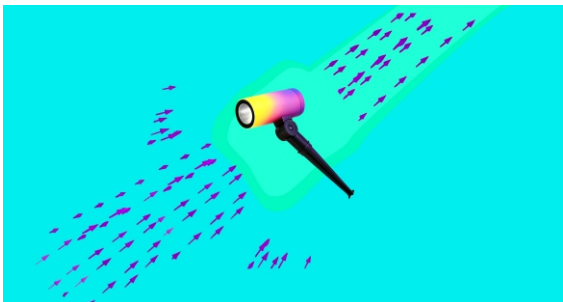

Thermal Effects to Air



Thermal Conductivity

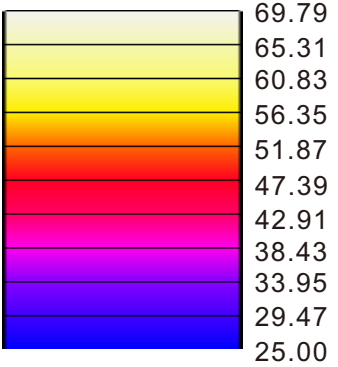



Unit:°C

LUMINAIRE PHOTOMETRIC TEST REPORT

MODEL: SL-PL006

TYPE: 4000K

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 38.353 lm/W
MODEL	SL-PL006-18W	Imax(cd/klm)	32961	S/MH(C0/180)	0.24	
NOMINAL POWER(W)	18	LOR(%)	498.3	S/MH(C90/270)	0.49	
RATED VOLTAGE(V)	220.0	TOTAL FLUX(lm/klm)	4982.9	η UP,DN(C0-180)	0.0,145.3	
NOMINAL FLUX(lm)	130	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.0,353.0	
LAMPS INSIDE	1	η up(%)	0.0	CIBSE SHR NOM	0.00	
TEST VOLTAGE(V)	220.0	η down(%)	498.3	CIBSE SHR MAX	0.05	

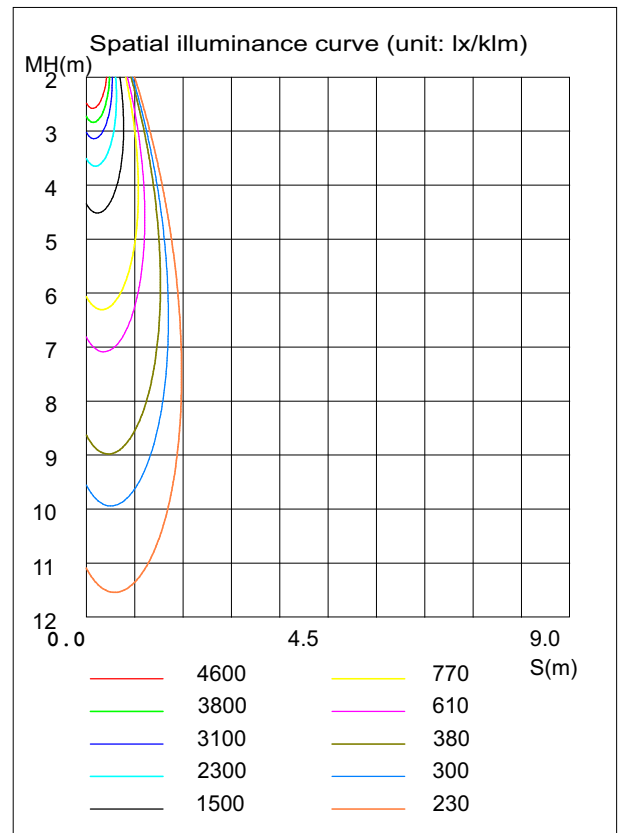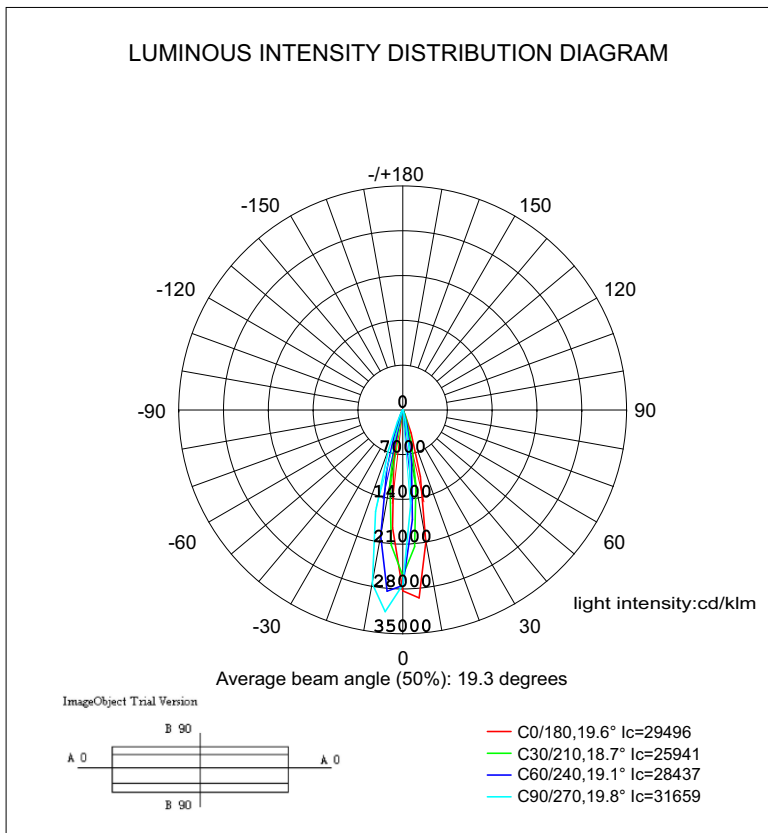

C angle range:0 - 360DEG

C angle interval: 10.0DEG

Test Speed: HIGH

Temperature:25.3℃

V angle range:0 - 120DEG

V angle interval: 5.0DEG

Test S ystem:EVERFINE GO-2000A_V1 SYSTEM V2.00.471

Humidity:65.0%

Test Distance:8.431m [K=1.0000]

SPECIFICATIONS



PARAMETERS			
Model	SL-PL006	SL-PL006	SL-PL006
Lamp Power	7-10W	12-20W	25-30W
Diameter	Φ 60*300mm	Φ 80*300mm	Φ 100*400mm
Material	Aluminum		
Body Color	Black/Grey/Brown		
Beam Angle	19.3°		
Light Source	COB		
Luminous Efficacy	38.35 lm/W		
CRI	Ra≥70		
CCT Options	3000K/4000K/6500K		
Driver Type	Isolated Driver PASS 3750V Waterproof		
Input Voltage	AC100-240V		
PF	≥ 0.9		
Frequency	50/60Hz		
IP	IP66		
Life Time	20000H		
Warranty	3-Years		


PACKING DETAILS

Lamp Power	PCS/CTN	Packing Size(CM)	CBM	40HQ/PCS
7-10W	50	37.5*37.5*34CM	0.047	1422
12-20W	30	53*45*33CM	0.078	863
25-30W	20	56*45*33CM	0.0833	817


PACKAGING



Installation Type

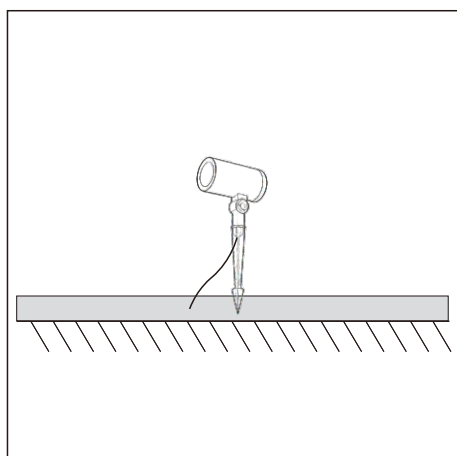


1. The lamp is placed flat on the ground, and the power cord is connected

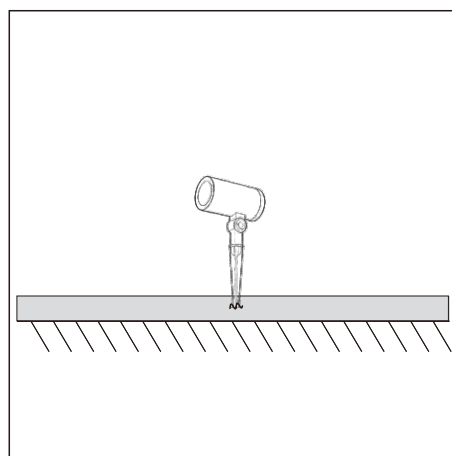

2. Press the pointed foot into the soil and complete the installation

DIAGRAMS

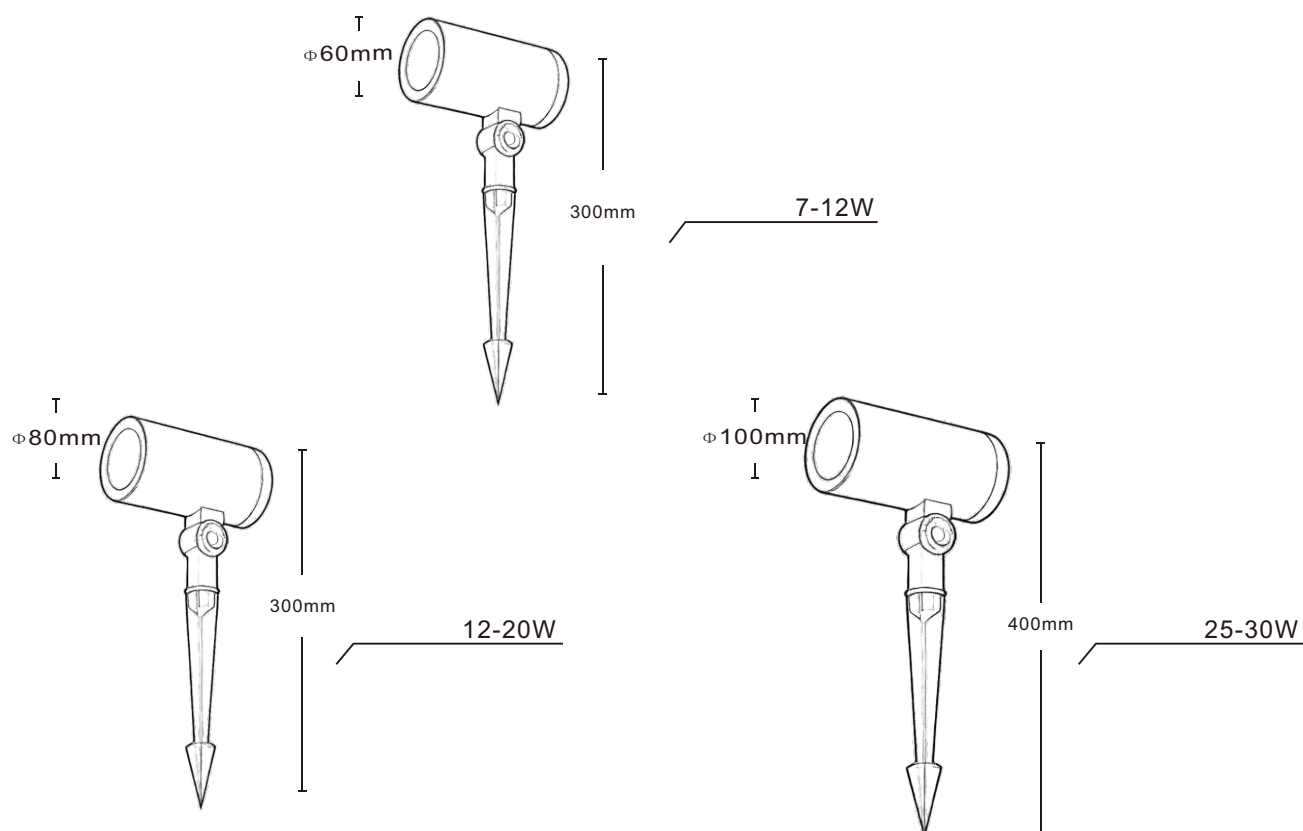



FEATURES

- 1.AC100-240V
- 2.LED chips : OSRAM CHIPS/Sanan **OSRAM** 
- 3.Driver : Isolated Driver PASS 3750V Waterproof
- 4.Waterproof rating:IP66
- 5.Export certificates available
- 6.Aluminum lamp body



EMG REACH EEL IECCE

CAUTIONS:

1. Installation must be done by professional electricians .
2. Do NOT take apart the product. It may be dangerous.
3. Do NOT stare at the light with naked eyes. It is harmful to the eyes
It is harmful by our own to repair or replace without any charge.

WARRANTY:

- 1.The manufacturer guarantees the floor lamp to be free from material and workmanship defects for a period of 3 years
2. Warranty becomes void if the products is modified, improperly installed or used, damaged by accident or neglect, or if any parts are improperly installed or replaced by the user.
3. During the warranty time, if the products fails at normal environment and we will repair or replace it free of charge at our discretion

